

Unit :mm

TECHNICAL DATA

Electrical Properties

Frequency Range : 2400~2485 MHz

Impedance : 50 OHMS $\pm 5\Omega$

SWR : ≤ 1.3

Gain : 9 dBi

Radiation : Omni directional

Polarization : Vertical

Mechanical Properties

Connector : N (FEMALE)

Weight : 370 g

Radiator : Copper

Radome : Fiberglass


Mounting : Aluminum Alloy

Guide Pipe : Aluminum Alloy


Bracket : Aluminum Alloy

* Mast kit Accepted $\varnothing 20$ - $\varnothing 29$ mast diameter


Return Loss

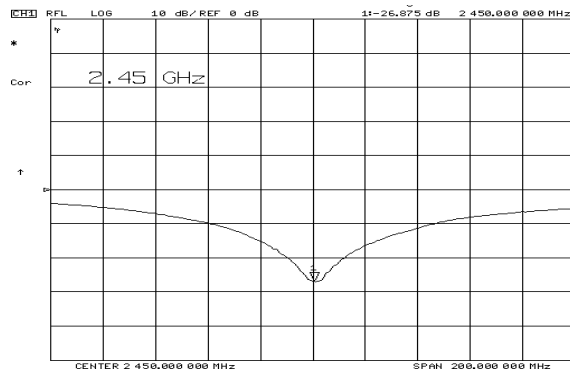

VSWR

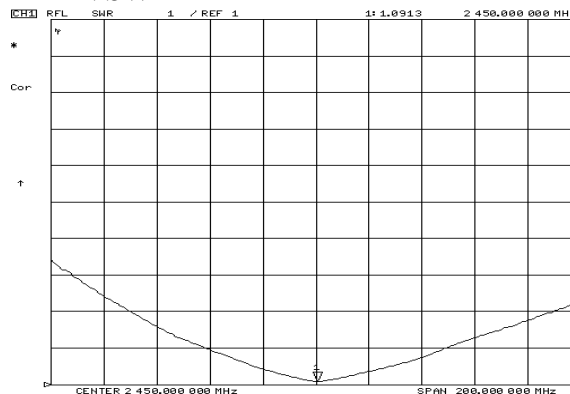

E-PLANE FIELD PATTERNS

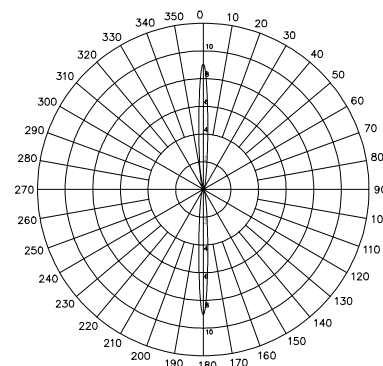

H-PLANE FIELD PATTERNS

